


SKX 14/1




Składa się z | Consist of

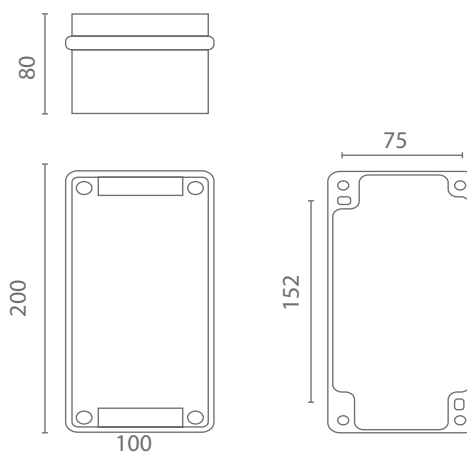


1.41


2x Łącznik PBT 01 |
2x Pushbutton PBT 01



Przycisk SPO 01/1 - SPO 01/2 |
Pushbutton actuator SPO 01/1 - SPO 01/2



Lampka SLP - SPO 02/2 |
Signal lamp SLP - SPO 02/2



Kaseta sterownicza Przyciski START/STOP oraz lampka

II 2G Ex de IIC T6
II 2D tD A21 IP66 T80°C

Obudowa: poliester wzmacniany włóknem szklanym
Pokrywka: poliester wzmacniany włóknem szklanym, zintegrowana uszczelka wykonana z termoplastycznego elastomeru, 4 śruby M5 ze stali nierdzewnej

Dławnica: 1xM25 Średnica przew.: ø6-15mm
Napięcie znam. izolacji: 690V Napięcie znam.: 250V AC
Prąd znamionowy: 16A

IP: 66 IK: 08

Certyfikat: CESI 13 ATEX 017X

Control gear Pushbuttons START/STOP and lamp

II 2G Ex de IIC T6
II 2D tD A21 IP66 T80°C

Housing: poliester reinforced with fibre glass
Cover: poliester reinforced with fibre glass, integrated thermoplastic elastomer gasket, four stainless steel M5 screws

Cable gland: 1xM25 Cable diameter: ø6-15mm
Insulation rated voltage: 690V Rated voltage: 250V AC
Rated current: 16A

IP: 66 IK: 08

Certificate: CESI 13 ATEX 017X