

TEPEX d.o.o. tel. 049 222 900 fax. 049 426 450 e-mail: tepex@tepex.hr www.tepex.hr	USER MANUAL FOR EXPLOSION PROTECTED BULKHEAD LIGHT FITTING TYPE 0403.24/LED	
	Broj: TEPEX.RS.082	Rev : 0

CONTENT

1.	Manufacturer	1
2.	General safety information's	1
3.	Purpose	2
4.	Product compliance	2
5.	Degree of protection and technical data	2
6.	Types	3
7.	Installation and putting into operation	3
8.	Dimensions	3
9.	Spare parts and accessories	3
10.	Inspection, maintenance, repair and overhaul	4
11.	Responsibility and authorization	4
12.	Storage and transport	4
13.	Manufacturer's warranty	4
14.	Marking	4

1. MANUFACTURER

TEP Ex d.o.o.
Prilaz dr. Franje Tuđmana 6 HR-49210 ZABOK
Telephone: +385 49 222 900
Internet: www.tepex.hr

2. GENERAL SAFETY INFORMATIONS



WARNING!

The user manual contains basic information about the product. Mounting, installation, usage and maintenance should be carried out under this user manual to provide and ensure safe operation within the nominal characteristics. This user manual complement national Regulation and Standards. The responsible person shall ensure their implementation. Failure off implement this user manual can reduce explosion protection and endanger people, property and the environment. Any improper and illegal actions as well as non-compliance with the provisions of this user manual excludes all responsibility by manufacturer side.

Before installation/commissioning:

- Carefully read all instructions,
- Execute proper training of responsible personnel,
- Check that the contents of these instructions is fully understandable by the responsible personnel,
- Make sure that all the requirements and national Regulations as well as all special security measures are applied.

In lack of understanding:

- Contact the manufacturer.

During operation:

- Ensure that this user manual and other work instructions are available to the responsible staff at all times,
- Check the implementation of these instructions and all other safety user's instructions.

3. PURPOSE

Explosion protected bulkhead light fitting, type 0403.24 / LED is intended for general lighting in industrial areas with potentially explosive atmosphere Zones 1, 2, 21, 22 in accordance with EN 60079-10-1/-2: 2009.

The quality of the materials ensures compliance with standard functionality in standard industrial atmosphere. For special requirements please contact the manufacturer.

4. PRODUCT COMPLIENCE


The product complies with the ATEX Directive 94/9 EC and standard:

- EN 60079-0:2012 / A11:2013,
- EN 60079-7:2007,
- EN 60079-18:2015,
- EN 60079-31:2014.

The product has been developed, manufactured and tested according to the existing state of technique accordance with the standards EN 9001:2008 and EN ISO / IEC 80079-34:2011.

- The product is in compliance with the ATEX Directive 2014/34/EU.
- The product is in compliance with the LVD Directive 2014/35 EU.
- The product is in compliance with the RoHS Directive 2011/65 EU.
- The product is in compliance with EMC Directive 2014/30/EU.

5. DEGREE OF PROTECTION AND TECHNICAL DATA

Certificate:	EXA 16 ATEX 0015
Category and explosion protection:	 II 2G Ex eb mb IIC T6 Gb II 2D Ex tb IIIC T80°C Db
Ambient temperature:	-30°C ≥ +50°C
Mechanical protection:	IP66
Resistance to shock:	IK 08
Class of protection	I (PE - protective earthing)
Rated voltage	230 V ± 10% AC
Frequency:	50/60 Hz
Rated power:	17 W
Power factor:	>0,95
LED light source:	ACRICH2 17W SMJD-3V16W1P3-H with OVP, OCP, OTP protection
OVP protection:	IEC 61000-4-5, EN 62031 3kV/1min impulse overvoltage 8/20µs 6kV/3kA
OCP protection:	2,5AT
OTP protection:	T _{smax} =80°C, resettable
Rated luminous flux:	1600 lm at T _{amb} = 25°C
Light colour:	2700 K
Refractive index(CRI):	>80
Estimated service life:	50 000 working hours T _{amb} = 25°C L90/B10
Connection terminal:	CMC 1-2, 0,5-4mm ² for connection of phase and neutral Conductor, Single-core, stranded Terminal for internal and external grounding, max 2 x 6 mm ² sol(r), sol(s), f Possible through-wiring max. 16A for 2.5mm ² wiring
Cable entries:	2xISO25
Ex e cable gland and plug:	One Ex e II 2G / II 2D cable glands M25x1,5 for cable Ø7-15 mm, and one Ex e II 2G / II 2D plug M25x1,5 are integral parts of lamps
Tightening torques values:	Screws M5x25 / 10 for fixing the protective grid: 4 Nm Pinch Nut of the Ex e cable glands: 2.5 Nm Body of the Ex e glands and plug: 3.5 Nm
Basic measures:	355x192x63 mm (LxWxH)
Installation on the surface:	two sheet metal brackets attached with screw kit M6
Weight:	cca 4 kg

6. TYPE

Bulkhead light fitting type 0403.24/LED

7. INSTALLATION AND PUTTING INTO OPERATION

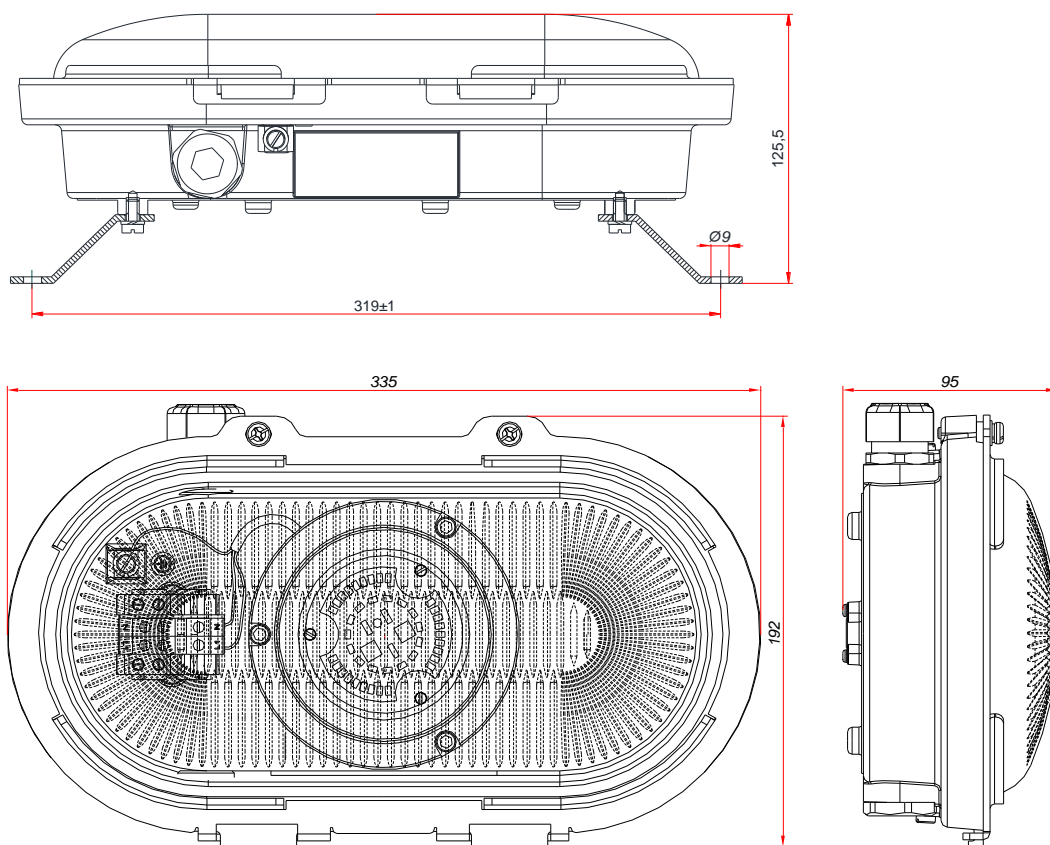
Installation and putting into operation have to be done according to technical and certification data on warning label on lamp, this user manual, national regulations and laws. Only with that, explosion-proof protection of bulkhead light fitting is ensured with EC-type examination certificate.

Installation of lamp (on wall or ceiling) is done with two steel brackets with M6 screws which are delivered with lamp.







Opening of Ex e enclosure is done by unscrewing two screws M5x25/10. Special attention must be dedicated to selection of inner gasket sealing ring of Ex e cable glands according to diameter of connecting cable. Pressure nut and intermediate gland must be tightened with nominal torque. Unused cable entries must be closed with plug. The electric connecting is performing by connecting power supply cable (L, NE, PE) on the connection terminals and terminal for internal grounding.

The closing of the Ex e enclosure should be done by a reverse sequence of action.

8. DIMENSIONS



9. SPARE PARTS AND ACCESSORIES

PART	DESCRIPTION	CODE	PART	DESCRIPTION	CODE
	Protective glass 0403.24/LED	0403.24/LED 20-110		II 2G Ex e II 2D EX e cable gland M25	SPU 25
	Protective framework 0403.24/LED	0403.24/LED 20-120		II 2G Ex e II 2D EX e Plug M25	SPC 25
	LED modul LEDEx 01	LEDEx 01		Terminals 0403.24/LED	0403.24/LED 20-130

10. INSPECTION, MAINTENANCE, REPAIR AND OVERHAUL

Inspections are carried out in accordance with IEC 60079-17, general and special conditions of manufacturer and users Regulations and includes supervision of parts on which the explosion protection depends, especially:

- that the housing, all part of housing, protective glass and gasket are without rupture and damage,
- that the housing is completely closed with set of protective glass
- that the cable gland, plug, connecting terminals, screws of protective grid are tightened with nominal torque.

All the repairs must be performed by the manufacturer or the manufacturer's authorized personal using the original parts according to the product documentation, all in accordance with EN 60079-19:2011.

If repair or any other procedure are performed on the product by unauthorized person, all producer responsibility for the product and the warranty and the manufacturer's Declaration of conformity becomes invalid.

11. RESPONSIBILITY AND AUTHORIZATION

This instruction is the basic information about the product. It is complementing with the corresponding national laws and regulations.

Production, use, certification and supervision are determined at the national level:

- Regulations concerning equipment and protective systems intended for use in potentially explosive atmospheres EU directive 94/9 EC (ATEX 94)
- Regulations on minimum requirements for safety and health protection of workers and technical inspection of facilities, equipment, installations and equipment in hazardous areas EU directive 1999/92/EC (ATEX 137).

The responsible person shall ensure their implementation at the working facility.

12. STORAGE AND TRANSPORT

Transportation and storage of the light fitting is only allowed in the original cardboard box.

13. MANUFACTURER'S WARRANTY

The manufacturer provides a Warranty on the product for a period of one year under the provisions of this User manual and the corresponded regulations and laws. This statement has the force of Warranty sheet.

14. MARKING

Explosion protected bulkhead light fitting, type 0403.24 / LED is marked with the external and the inner label with technical data:

