


HPL425LED






EXEMPLARY APPLICATIONS

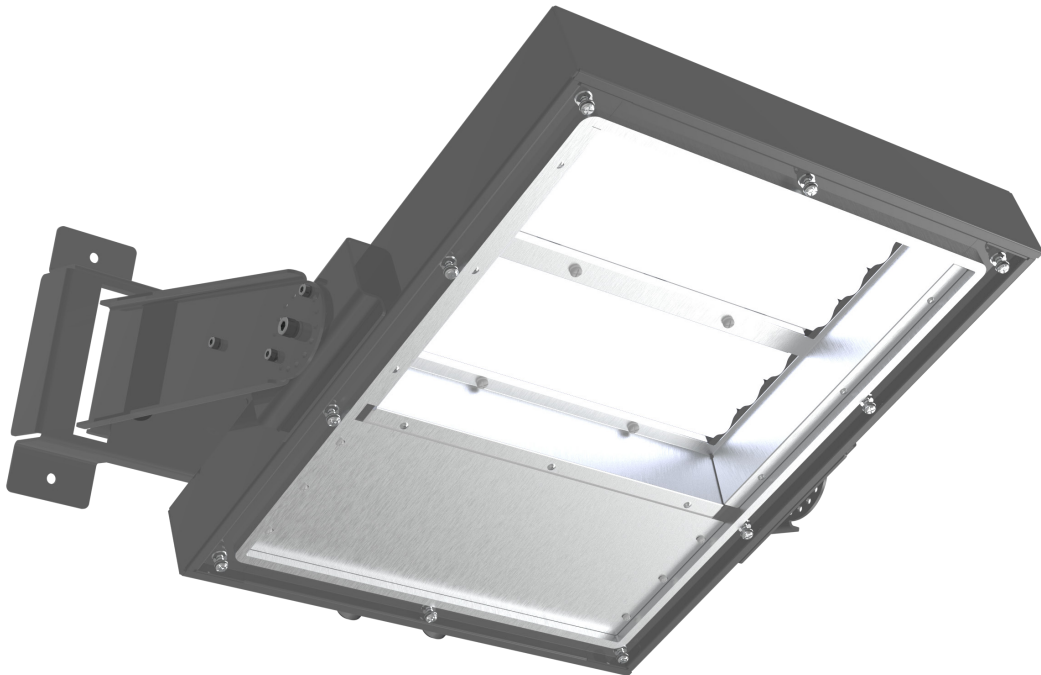

INDUSTRY
BUILDINGS



WAREHOUSES



PRODUCTION
LINES



PASSAGEWAYS

Anticorrosive, waterproof industrial luminaire with LED modules for indoor and outdoor applications. Thanks to use of optional vibro insulatr it is suitable to work in places exposed to the occurrence of vibrations.

Vibproof version **VP** as a standard.

Optionally with an integrated powers supply unit with DALI interface **DA**.

FEATURES







MECHANICAL PARAMETERS

	housing	powder coated stainless steel or galvanized steel
	diffuser	tempered glass or polycarbonate
	ingress protection	IP65
	protection class	I
	mounting	mounting on a bracket
	accessories	vibroinsulators



WORK PARAMETERS


	ambient temperature	-25°C to +50°C <i>check: types comparison</i>
	lifetime	>70.000h L ₈₀ B ₁₀

ELECTRICAL PARAMETERS


2,5 mm ²	connection terminals	
230V 0,50-60Hz	power supply	
certified LED modules	source of light	
>0,95	power factor	
Ø20	cable inlets	
L-N: 1kV L/N-PE: 2kV	overvoltage protection	

PHOTOMETRICAL PARAMETERS

>80	CRI	
4000K	colour temperature	

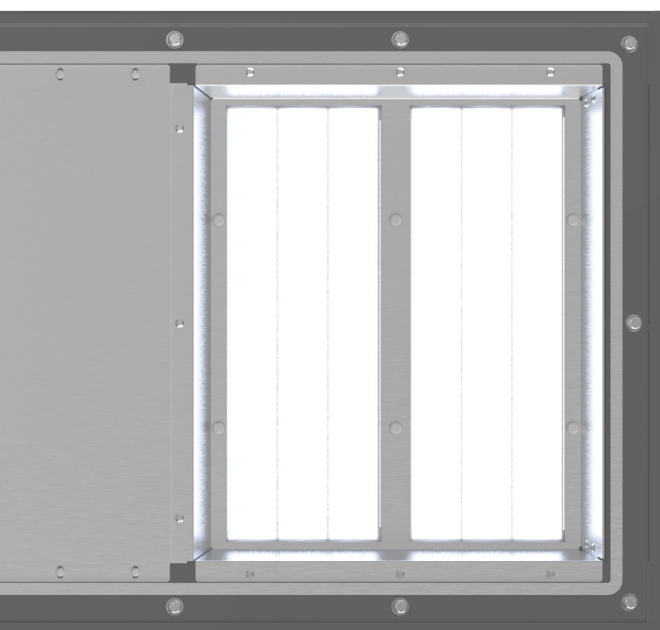

DIMENSIONS

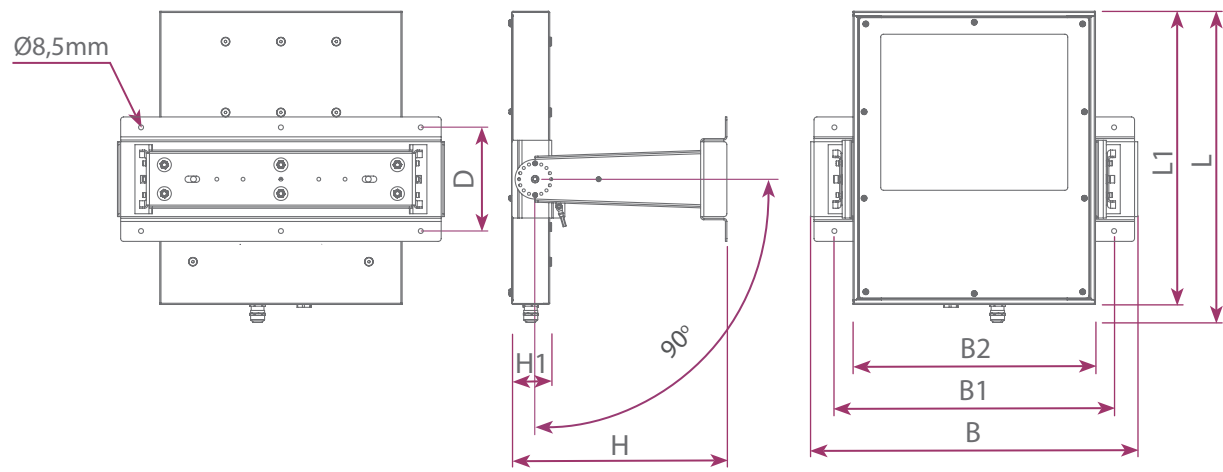

TYPE	L	L1	B	B1	B2	H	H1	D
HPL425LED	540	509	561	480	416	369	65	180

TYPES COMPARISON

TYPE OF THE FITTING	LUMINOUS FLUX [lm]	POWER CONSUMP.[W]	EFFICIENCY [lm/W]	MAX. AMB. TEMP. [°C]
HPL425LED-050	6 345	49,0	129	50
HPL425LED-060	7 685	62,0	124	40
HPL425LED-080	9 380	78,8	119	35



Luminous flux tolerance +/- 10%
Power tolerance +/- 10%
The parameters given in the following data sheet has been determined for the temperature Ta=25°C.

Luminous flux, light intensity distribution and efficiency has been tested on the basis of the standards EN ISO 17025:2005, norm series EN13032 and LM-79.


The actual data and General Warranty Conditions are available on our website www.atmlighting.pl

VIBRATIONPROOF VERSION



VIBRATIONPROOF VERSION (VP)

special viproinsulators for damping vibrations

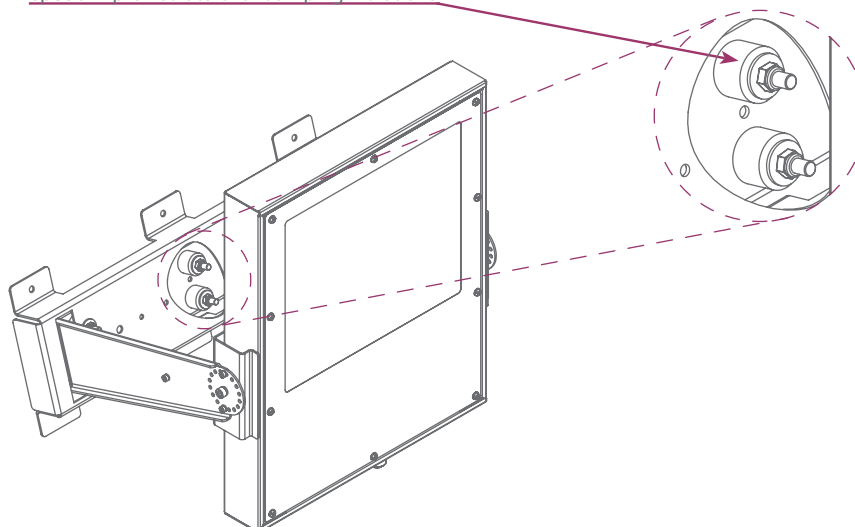

ADDITIONAL INFORMATION:

1. A special anaerobic adhesive was used to increase durability and safety on sensitive threaded connections and it prevents self-loosening of parts subjected to vibrations.
2. An additional bracket made of high-strength stainless steel increases safety in case of damage to damped elements (see Fig. 1.1).
3. The luminaire is additionally secured with a protective cable (see Fig. 1.2).
4. It is possible to equip the luminaire with an additional accessory (plug&forget), which allows the luminaire installation without the need to open it (see Fig. 1.3).

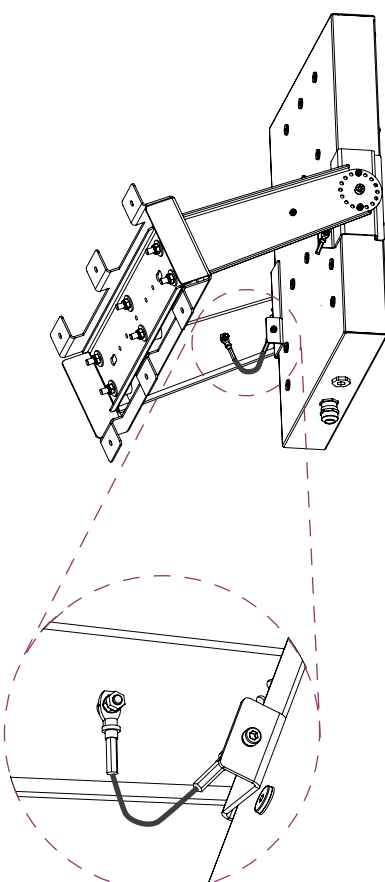


Fig. 1.2

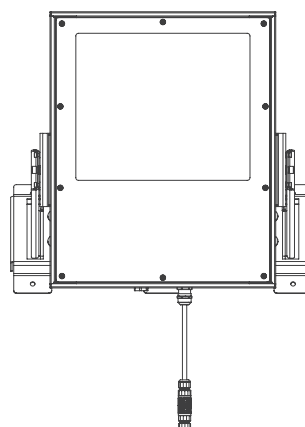


Fig. 1.3


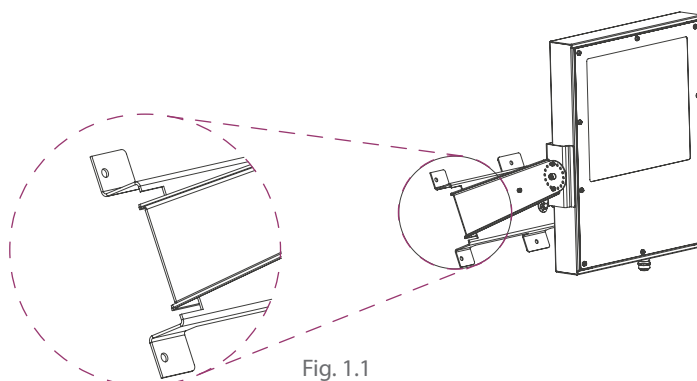


Fig. 1.1

PHOTOMETRY



CONFIGURATION

H	P	L	4	2	5	L	E	D	-				-	3	5	E	-		P	20	-			-	VP	-		DA
group										0	5	0				30		10	RST		GS		GL					
industrial										0	6	0				33		20			NIRO		PC					
light fittings										0	8	0				50												
type																												
type 425																												
source of light																												
LED modules																												
approximate power																												
[W]																												
power supply																												
34E - 230V 0,50÷60Hz																												
wiring																												
30 - single 3-pole terminal																												
33 - double 3-pole terminal																												
50 - single 5-pole terminal																												
cable inlets - quantity																												
10 - one cable inlet on one side of the housing																												
20 - two cable inlets on one side of the housing																												
cable inlets - type																												
P - plastic cable inlet																												
RST - plug&socket set																												
cable inlets - size																												
20 - Ø20																												
housing material																												
GS - galvanized steel																												
NIRO - stainless steel																												
diffuser material																												
GL - tempered glass																												
PC - polycarbonate																												
additional equipment																												
VP - version with vibroinsulators																												
optional versions																												
DA - version with an integrated power supply with DALI interface																												



Optional DA version of the light fitting is equipped with an integrated power supply unit with DALI interface, which allows to control parameters of lighting - depending on data from motion sensors or BIM settings. Properly configured lighting control system can significantly reduce costs of energy and improve the ergonomics of users.



Optional version with plug&socket set, so it is not needed to open the fitting during installation. This solution allows fast assembly and simplifies further exploitation.

DOWNLOADS

LDT



CE